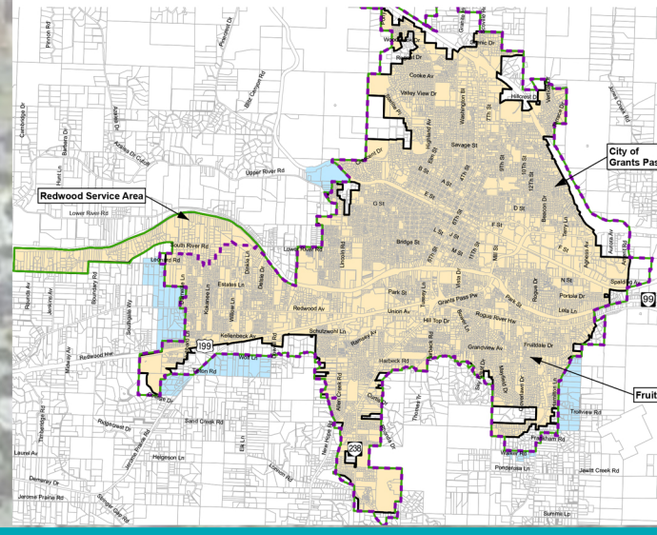

City of Grants Pass

Collection System Master Plan Update

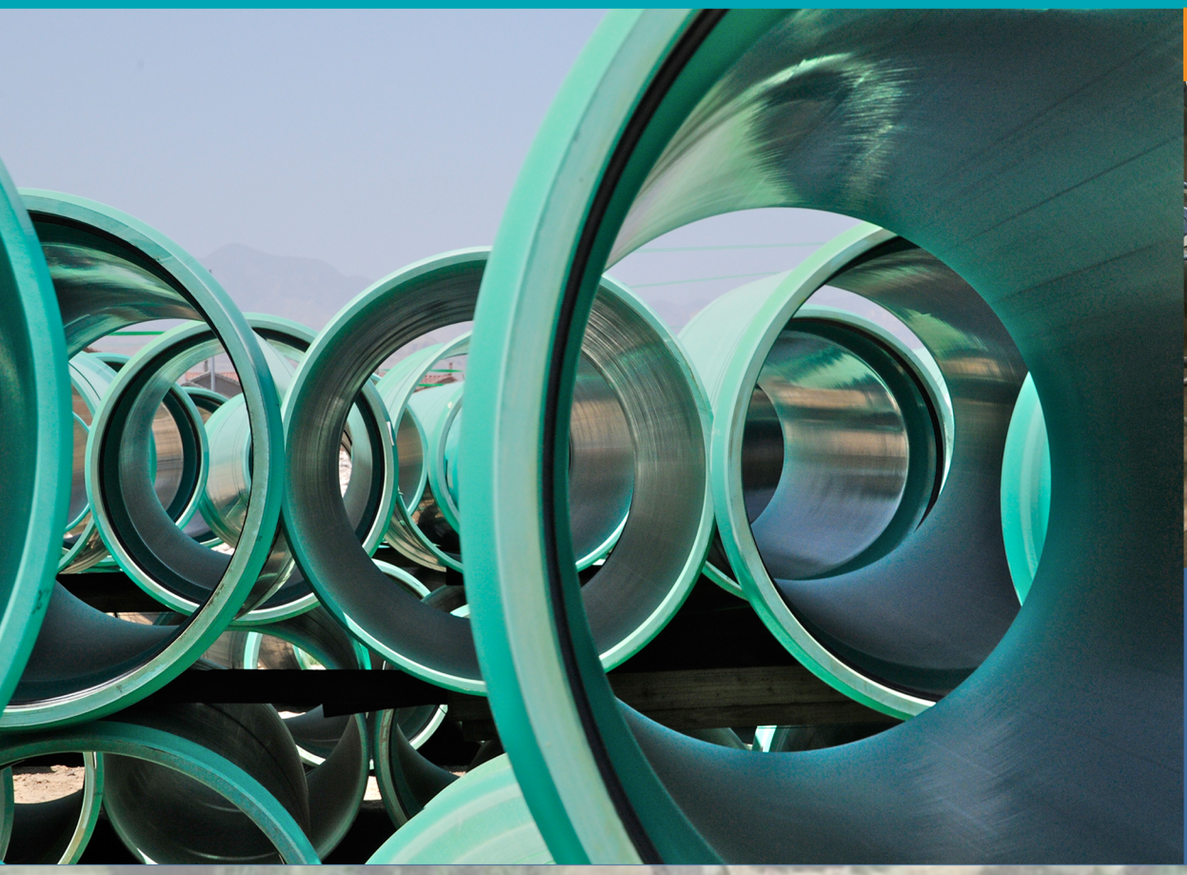

FINAL

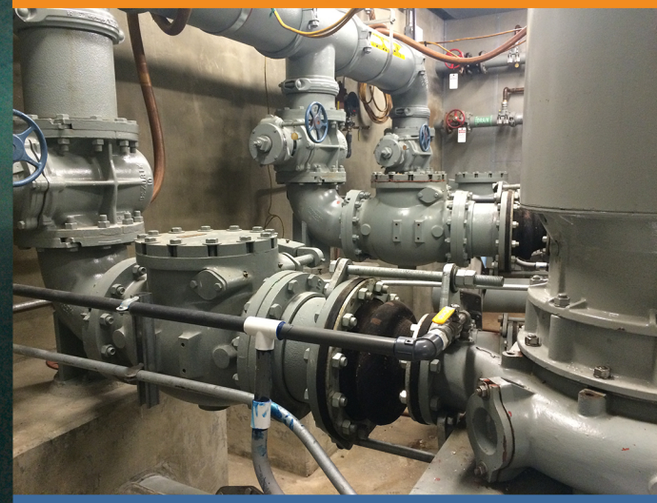

JULY 2016

carollo

Engineers...Working Wonders With Water®

CITY OF GRANTS PASS

COLLECTION SYSTEM MASTER PLAN UPDATE

July 2016

FINAL

Digitally signed by Lara Kammereck
Contact Info: Carollo Engineers, Inc.
Date: 2016.07.28 14:06:50-07'00'

REGISTERED PROFESSIONAL ENGINEER
81417
OREGON
MAY 13, 2008
LARA RAE KAMMERECK
EXPIRES: 06/30/17

Digitally signed by Bhargavi Maremanda
Date: 2016.07.29 13:23:09 -07'00'

REGISTERED PROFESSIONAL ENGINEER
76549
OREGON
DEC. 31, 2007
BHARGAVI MAREMANDA
EXPIRES: 12/31/16

720 SW WASHINGTON STREET, SUITE 550 • PORTLAND, OREGON 97205 • P. 503.227.1885 • F. 503.227.1747

CITY OF GRANTS PASS

WASTEWATER COLLECTION SYSTEM MASTER PLAN

TABLE OF CONTENTS

Page No.

EXECUTIVE SUMMARY

ES.1 INTRODUCTION ES-1
ES.2 BASIS OF PLANNING ES-1
ES.3 FLOW PROJECTIONS ES-2
ES.4 EXISTING SYSTEM AND CONDITION ASSESSMENT ES-4
ES.5 HYDRAULIC MODEL DEVELOPMENT ES-10
ES.6 CAPACITY EVALUATION AND PROPOSED IMPROVEMENTS ES-10
ES.7 CAPITAL IMPROVEMENTS PLAN ES-12

CHAPTER 1 – INTRODUCTION AND SERVICE AREA CHARACTERISTICS

1.1 INTRODUCTION 1-1
1.2 OBJECTIVE 1-1
1.3 BACKGROUND 1-2
1.3.1 Wastewater Service Area 1-2
1.3.2 Land Use 1-4
1.4 REPORT ORGANIZATION 1-8
1.5 ABBREVIATIONS 1-9

CHAPTER 2 – POLICIES AND CRITERIA

2.1 INTRODUCTION 2-1
2.2 POLICIES 2-1
2.2.1 Service Area 2-2
2.2.2 Environmental Stewardship 2-4
2.2.3 Management, Operation, and Maintenance Programs 2-4
2.2.4 System Analysis 2-5
2.2.5 Capital Facilities Project Funding Priorities 2-8

CHAPTER 3 – FLOW PROJECTIONS

3.1 INTRODUCTION 3-1
3.2 SEWER COLLECTION SYSTEM FLOWS 3-1
3.2.1 Dry Weather Flow 3-1
3.2.2 Wet Weather Flow 3-3
3.2.3 Peak Wet Weather Flow (Design Flow) 3-6
3.3 FLOW MONITORING PROGRAM SUMMARY 3-6
3.4 COLLECTION SYSTEM FLOW PROJECTIONS 3-7
3.4.1 Historic WRP Flows 3-7
3.4.2 Wastewater Flow Coefficients 3-7

3.4.3 Industrial Customers 3-10
3.4.4 Future Customer Connection Assumptions 3-13
3.4.5 Wastewater Basins 3-13
3.4.6 Existing and Projected Average Dry Weather Flow 3-13
3.4.7 Peak Wet Weather Flow Development 3-19
3.4.8 Flow Projection Summary 3-27

CHAPTER 4 – EXISTING COLLECTION SYSTEM AND CONDITION ASSESSMENT

4.1 INTRODUCTION 4-1
4.2 COLLECTION SYSTEM FACILITIES 4-1
4.2.1 Wastewater Basins 4-1
4.2.2 Gravity Collection System 4-1
4.2.3 Diversion Structures 4-4
4.2.4 Siphons 4-6
4.2.5 Recent Pipe Projects Completed 4-6
4.2.6 Pump Stations 4-6
4.3 PIPE REMAINING USEFUL LIFE AND CONDITION ASSESSMENT 4-12
4.3.1 Data Inventory Introduction 4-12
4.3.2 Remaining Useful Life (RUL) 4-14
4.3.3 Maintenance Data Assessment 4-18
4.3.4 Structural Data Assessment 4-26
4.3.5 Repair and Replacement Prioritization - RUL and Condition Scoring 4-30
4.3.6 Recommendations 4-37
4.4 CONDITION ASSESSMENT OF EXISTING PUMP STATIONS 4-37
4.4.1 Webster Lift Station No. 1 4-37
4.4.2 Webster Lift Station No. 2 4-38
4.4.3 Bridge Street Pump Station 4-38
4.4.4 Redwood Pump Station 4-39
4.4.5 Darneille Pump Station 4-39

CHAPTER 5 –COLLECTION SYSTEM ANALYSIS

5.1 INTRODUCTION 5-1
5.2 HYDRAULIC MODEL DEVELOPMENT 5-1
5.2.1 Hydraulic Model Update 5-1
5.2.2 Hydraulic Model Calibration 5-3
5.3 SYSTEM EVALUATION CRITERIA 5-4
5.3.1 Design Criteria 5-4
5.3.2 Performance Criteria 5-4
5.4 COLLECTION SYSTEM CAPACITY EVALUATION 5-5
5.4.1 Gravity Collection System Evaluation 5-6
5.4.2 Pump Station Evaluation 5-13
5.4.3 Capacity Evaluation Summary 5-16
5.5 RECOMMENDED COLLECTION SYSTEM IMPROVEMENTS 5-17
5.5.1 Pipe Improvement Assumptions 5-17
5.5.2 Recommended System Piping Improvements 5-18
5.5.3 Recommended Pump Station Improvements 5-28
5.5.4 Project Phasing 5-31
5.5.5 Proposed Improvements Summary 5-35

CHAPTER 6 – CAPITAL IMPROVEMENT PLAN

6.1 INTRODUCTION 6-1
6.2 COST ESTIMATING ACCURACY 6-2
6.3 COST ESTIMATING ASSUMPTIONS 6-2
6.3.1 Baseline Unit Cost 6-2
6.3.2 Baseline Construction Cost 6-6
6.3.3 Estimated Construction Cost 6-6
6.3.4 Total Allied Project Cost 6-6
6.3.5 Total Capital Improvement Cost 6-6
6.4 CAPITAL IMPROVEMENT IMPLEMENTATION 6-7
6.5 CAPITAL IMPROVEMENT PROGRAM 6-8
6.5.1 Capital Improvement Program Overview 6-8
6.5.2 Repair and Replacement Projects 6-11
6.5.3 Capacity Projects 6-14
6.5.4 Expansion Projects 6-25
6.5.5 Pipelines and Pump Stations Projects Summary 6-29
6.5.6 General Projects 6-30
6.6 CAPITAL IMPROVEMENTS PLAN DETAILS 6-32

CHAPTER 7 – CAPITAL IMPROVEMENT PROJECT DETAIL SUMMARY SHEETS

CHAPTER 7 7-1

LIST OF APPENDICES

APPENDIX A Urban Reserve Areas Evaluation
APPENDIX B Interlocal Agreement with Josephine County
APPENDIX C City's Work Plan
APPENDIX D Emergency Overflow Response Plan
APPENDIX E TM - Model Development and Calibration and V&A Sanitary Sewer Flow Monitoring and Inflow/Infiltration Study
APPENDIX F Spalding Pump Station Analysis Memorandum
APPENDIX G Darneille Pump Station Improvement Options
APPENDIX H Capital Improvement Costs Details

LIST OF TABLES

Table ES.1 Existing and Projected Wastewater Flows to WRP ES-4
Table ES.2 Weighting Factors for Condition Assessment ES-8
Table ES.3 Pump Station Condition Assessment Summary ES-9
Table ES.4 CIP Summary by Implementation Phase ES-13

Table 1.1 Existing Land Use Summary (Existing Sewer Service Area) 1-7

Table 2.1 Service Policies 2-2
Table 2.2 Environmental Stewardship 2-4
Table 2.3 Management, Operation, and Maintenance Programs 2-5
Table 2.4 System Analysis 2-5

Table 3.1 Flow Coefficients Development Summary 3-9
Table 3.2 Existing Zoning and Future Land Use Correlation 3-10
Table 3.3 ADWF Projections Summary by Sewer Basin 3-18
Table 3.4 Design Flows by Wastewater Basin 3-23
Table 3.5 Peaking Factors and Peak I/I Rates 3-25
Table 3.6 Existing and Projected Wastewater Flows to WRP 3-27

Table 4.1 Collection System Gravity Main Inventory 4-4
Table 4.2 Diversion Structures Locations 4-5
Table 4.3 Collection System Sanitary Sewer Overflows (2004 to Present) 4-5
Table 4.4 Existing Pump Stations 4-9
Table 4.5 Useful Life of Pipes 4-14
Table 4.6 Pipe Length of Major Collectors 4-17
Table 4.7 Weighting Factors for Condition Assessment 4-30
Table 4.8 Weighting Factors for Condition Assessment 4-36
Table 4.9 Pump Station Condition Assessment Summary 4-41

Table 5.1 Flow Depth Criteria Used in Modeling 5-5
Table 5.2 Pump Station Evaluation 5-15
Table 5.3 Proposed Pipe Projects Improvements 5-20
Table 5.4 Darneille Pump Station Improvement Options 5-30
Table 5.5 Proposed Projects Phasing Assumptions 5-32
Table 5.6 Improvement Projects Summary 5-35

Table 6.1 Gravity Pipeline Construction Unit Costs 6-3
Table 6.2 Force Main Construction Unit Costs 6-3
Table 6.3 Pipeline Casing for Major Crossings Construction Unit Costs 6-4
Table 6.4 CIP Summary by Implementation Phase 6-8
Table 6.5 CIP Summary by Facility Type 6-9
Table 6.6 Repair and Replacement Pipelines Cost Summary 6-12
Table 6.7 Capacity-Related Pipeline Projects Cost Summary 6-17
Table 6.8 Capacity-Related Pump Station Projects Cost Summary 6-24
Table 6.9 Proposed Expansion Projects Cost Summary 6-27
Table 6.10 Capital Improvement Plan Summary -- Gravity Pipelines 6-29
Table 6.11 Capital Improvement Plan Summary -- Pump Stations and Force Mains 6-30
Table 6.12 Detailed Capital Improvement Plan 6-33

LIST OF FIGURES

Figure ES.1 Wastewater Service Area ES-3
Figure ES.2 Existing Collection System ES-5
Figure ES.3 Condition Assessment Prioritization ES-7
Figure ES.4 Proposed System Improvement Projects Phasing ES-11
Figure ES.5 Phase 1 (2015-2020) Improvement Projects ES-14
Figure ES.6 Phase 2 (2021-2025) Improvement Projects ES-15
Figure ES.7 Phase 3 (2026-2035) Improvement Projects ES-16

Figure 1.1 Wastewater Service Area 1-3
Figure 1.2 Existing Land Use 1-5
Figure 1.3 Future Land Use 1-6

Figure 3.1 Typical Wastewater Flow Components 3-2
Figure 3.2 Typical Sources of Inflow and Infiltration 3-4
Figure 3.3 Typical Effects of Inflow and Infiltration 3-5
Figure 3.4 Industrial Dischargers Locations 3-11
Figure 3.5 Historic and Projected Industrial Dischargers Flows 3-12
Figure 3.6 Future Customer Connection Assumptions 3-14
Figure 3.7 Wastewater Basins 3-15
Figure 3.8 Historical and Projected ADWF Trend 3-17
Figure 3.9 Custom 5-Year, 24-Hour Design Storm Hyetograph 3-21
Figure 3.10 Peak I/I Rates Ranking for Existing Conditions 3-26
Figure 3.11 Design Flows Projection 3-28

Figure 4.1 Existing Collection System 4-2
Figure 4.2 Wastewater Basins 4-3
Figure 4.3 Sewer Pipelines Replaced Since 2004 4-7
Figure 4.4 Pump Station Tributary Areas 4-8
Figure 4.5 Darneille and Redwood Pump Station Current Operation Schematic 4-13
Figure 4.6 Collection System Pipe by Installation Years 4-15
Figure 4.7 Collection System Pipe by Type of Material 4-16
Figure 4.8 Location of Pipeline Reaching End of Useful Life by 2035 4-19
Figure 4.9 Length of Pipelines Reaching RUL before 2025 and 2035 4-20
Figure 4.10 6-Months Cleaning Program Locations 4-21
Figure 4.11 Rocks and Sand Maintenance Issues 4-22
Figure 4.12 Grease Related Maintenance Issues 4-24
Figure 4.13 Roots Related Maintenance Issues 4-25
Figure 4.14 Pipes with Holes 4-27
Figure 4.15 Pipes with Cracks 4-28
Figure 4.16 Pipe with Corrosion Issues 4-29
Figure 4.17 Maintenance Data Scoring 4-31
Figure 4.18 Structural Data Scoring 4-33
Figure 4.19 Maintenance and Structural Data Scoring 4-34
Figure 4.20 Condition Assessment Prioritization 4-35

Figure 5.1 Modeled Collection System 5-2
Figure 5.2 Sample Illustration of Backwater Effects in a Sewer 5-7
Figure 5.3 Spalding Area and South Rogue River Proposed Connection Projects 5-9
Figure 5.4 South Highway Area Proposed Connection Projects 5-10

Figure 5.5 North I-5 Area and West NW Starlite Ln Proposed Connection Projects . 5-12
Figure 5.6 Collection System Capacity Analysis Deficiencies 5-14
Figure 5.7 Proposed Pipe Capacity-Related Improvements Projects 5-19
Figure 5.8 Proposed System Improvement Projects Phasing 5-34

Figure 6.1 Pump Station Cost Curve 6-5
Figure 6.2 Total CIP Cost Repartition by Project Purpose 6-10
Figure 6.3 Total CIP Cost Repartition by Implementation Phase 6-10
Figure 6.4 Repair and Replacement Recommended Project Locations and Phasing 6-13
Figure 6.5 Recommended Capacity Improvement Project Locations 6-15
Figure 6.6 Recommended Capacity Improvement Project Phasing 6-16
Figure 6.7 Proposed System Expansion Project Locations 6-26
Figure 6.8 Phase 1 (2015-2020) Improvement Projects 6-37
Figure 6.9 Phase 2 (2021-2025) Improvement Projects 6-38
Figure 6.10 Phase 3 (2026-2035) Improvement Projects 6-39